




## CVUN-100AC/15-BUJA-Z

### Specifications

Capacity $C_{max}$ (nominal)	100 pF
Capacity $C_{min}$ (nominal)	10 pF
Voltage (Peak Test $U_{pt}$ / Peak Working $U_{pw}$ )	15 kV / 9 kV
Capacity Tolerance (linear Range)	10%
Max. Current $I_{max}$ at 13.56 MHz with	54 Arms
Conduction Cooling	15 W
Self Inductance	$\leq 8$ nH
Capacitance per turn	8.4 pF/turn
Torque	$\leq 0.2$ Nm
Net Weight	0.5 kg

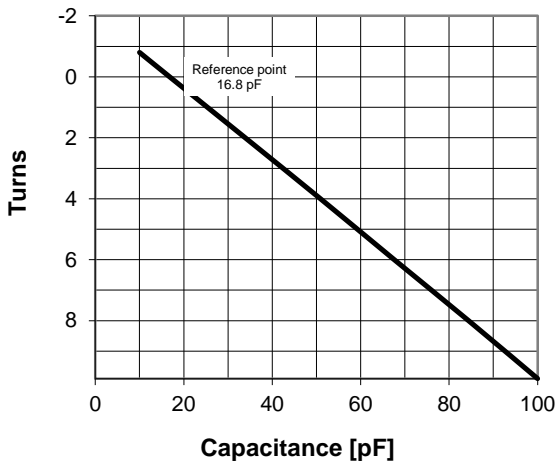

$I_{max}$  at 25°C ambient and 125°C surface temp. for convection and conduction (15 W) cooling


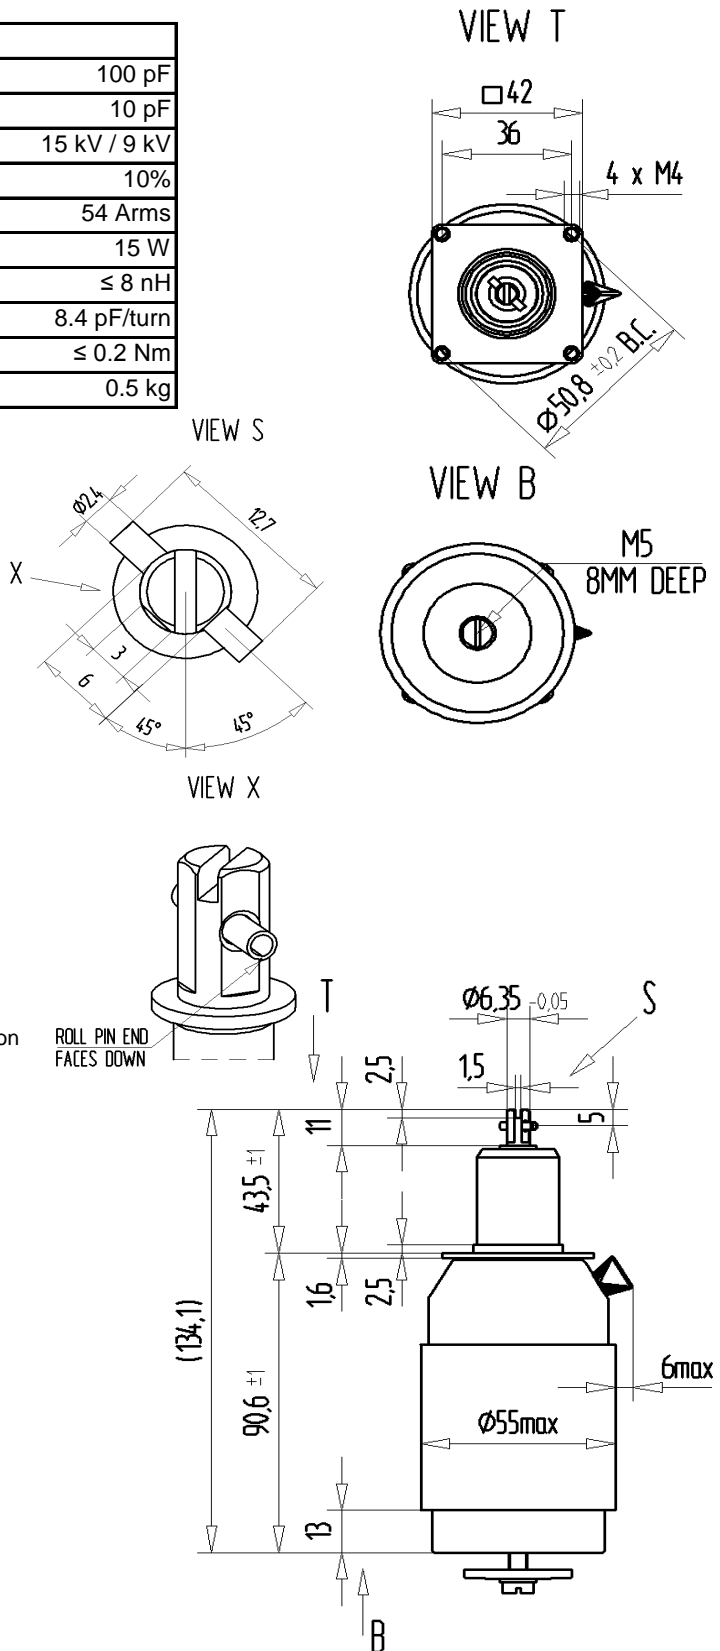
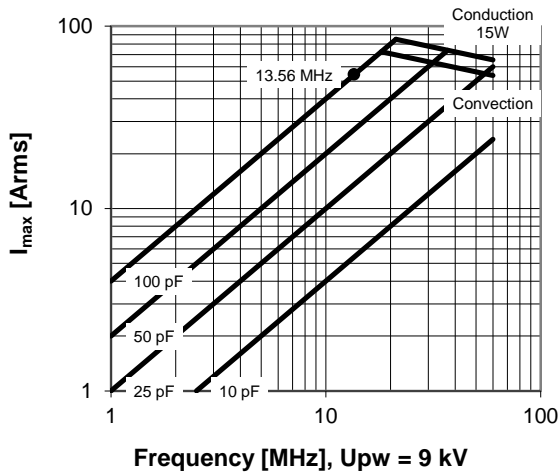


## CVUN-100AC/15-BUJA-Z

Turns	Nominal Capacitance [pF]	Tolerance
-0.8	10.0	10%
0.0	16.8	0%
2.0	33.9	10%
4.0	50.9	10%
6.0	67.6	10%
8.0	84.4	10%
9.9	100.0	10%

Mechanical stop at  $\leq 7$  pF at  $\sim -1.5$  turns  
Mechanical stop at  $> 100$  pF at  $\sim 10.3$  turns

Self inductance and resonance frequency

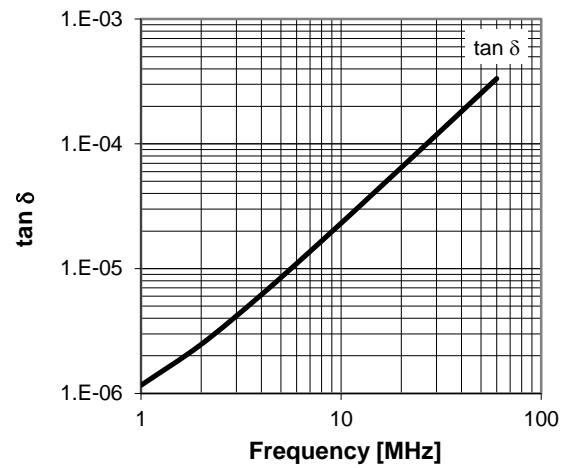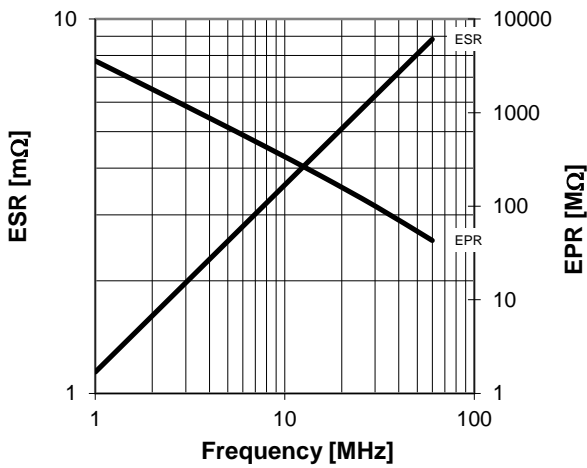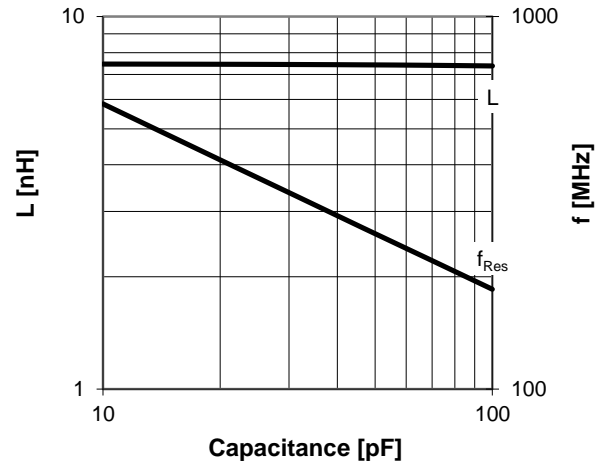

**Special Features:**

Special Series Features