

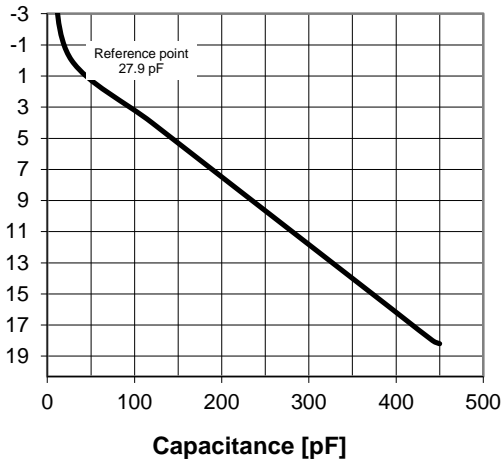
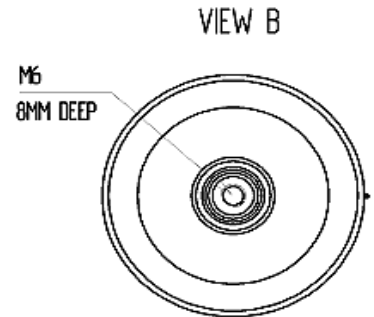
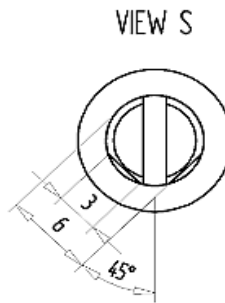
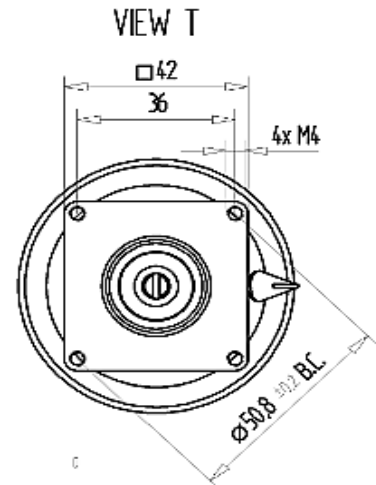


## CVUN-450BC/12-BEAA

Specifications	
Capacitance $C_{max}$ (nominal)	450 pF
Capacitance $C_{min}$ (nominal)	8 pF
Voltage (Peak Test $U_{pt}$ / Peak Working $U_{pw}$ )	12 kV / 7.2 kV
Capacitance Tolerance (linear Range)	10%
Max. Current $I_{max}$ at 13.56 MHz with	94 Arms
Conduction Cooling	20 W
Self Inductance	$\leq 10$ nH
Capacitance per turn	23.2 pF/turn
Torque	$\leq 0.2$ Nm
Net Weight	0.65 kg

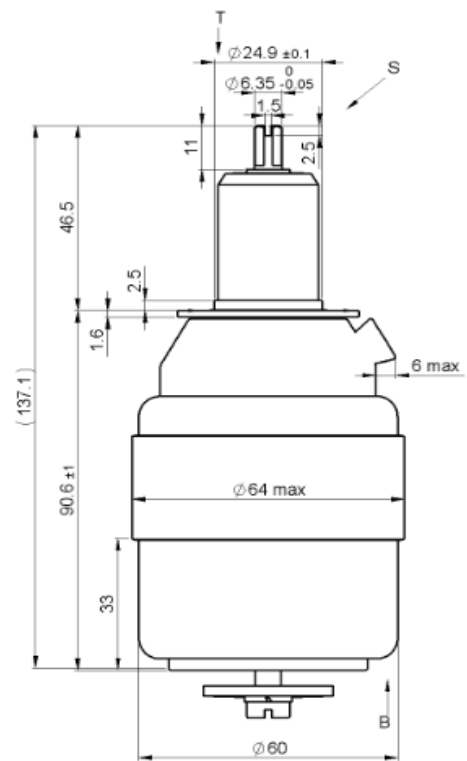

$I_{max}$  at 25°C ambient and 125°C surface temp. for convection and conduction (20 W) cooling

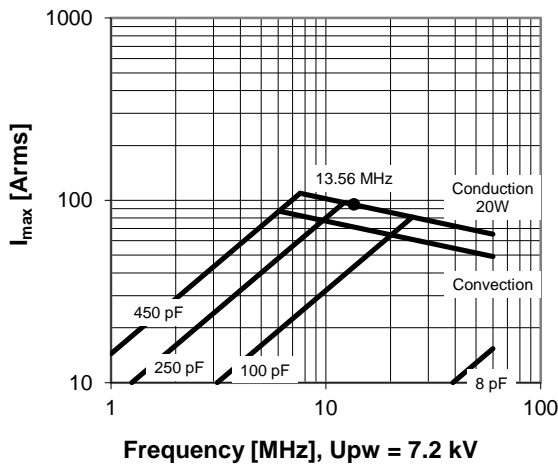

Subject to change without prior notice

Note: Technical information in Service Bulletin SB-52 must be considered




## CVUN-450BC/12-BEAA

Turns	Nominal Capacitance [pF]	Tolerance
-5.0	8.0	10%
0.0	27.9	0%
4.0	120.0	10%
8.0	211.9	10%
12.0	303.9	10%
16.0	395.9	10%
18.0	441.9	10%
18.2	450.0	10%

Mechanical stop at < 8 pF at ~ -5.8 turns  
 Mechanical stop at > 450 pF at ~ 18.4 turns

Due to increased turns to reach Cmin position the lifetime of the belows will be reduced.  
 Values shown in SB-56 are not valid.

Self inductance and resonance frequency

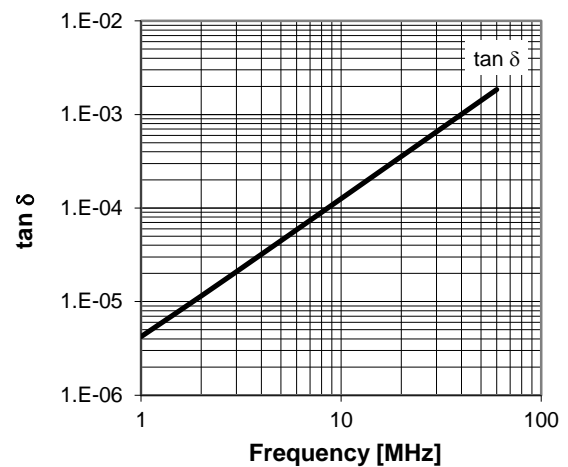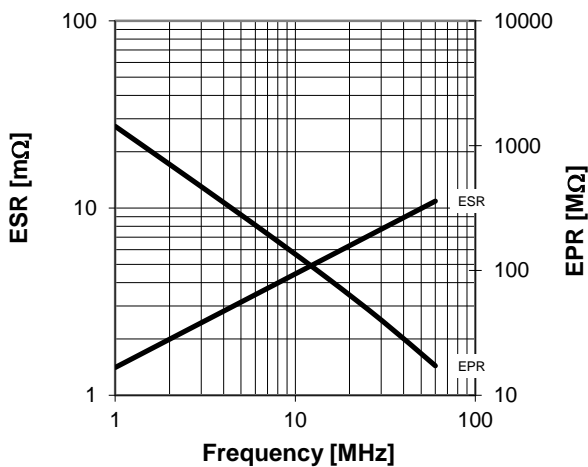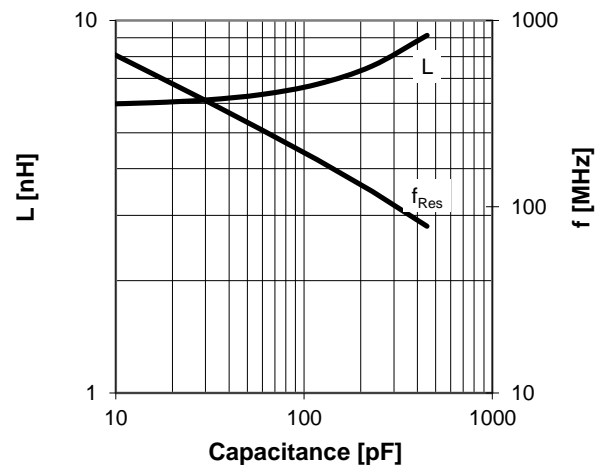

Subject to change without prior notice

Note: Technical information in Service Bulletin  
 SB-52 must be considered